



**BKH SAE - COMPANION (FLAT FACE) X
COMPANION (FLAT FACE) CODE 61/62 STEEL**

BALL VALVES

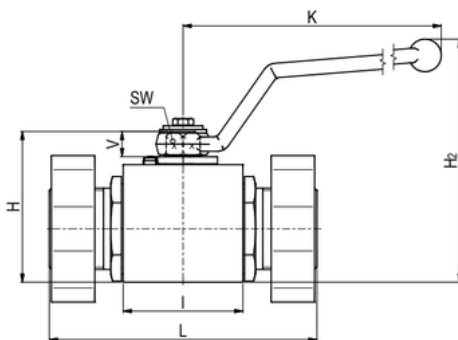

ACCESSORIES ON REQUEST

- Locking devices
- Actuator
- Mounting holes
- Positions switches
- Combinations
- Detent

MATERIAL CODE DESCRIPTION

Materials	112A
Body	Steel
Ball	Steel
Stem	Steel
Ball Seats	POM
O-Rings	NBR
Tmin / Tmax	-4°F / 212°F

AVAILABLE SIZES

1/2" to 1" (Dash Size 8-16)

CONNECTIONS

ISO 61-1, ISO 62-2


GENERAL DIMENSIONS

TYPE	SIZE	I	B	H	h	m	V	SW	K	H ₂	Handle
BKH-8-F3-112A	1/2"	1.89	1.38	2.13	1.57	0.75	0.43	0.35	4.53	3.50	Zn
BKH-12-F3-112A	3/4"	2.44	1.93	2.95	2.24	0.96	0.55	0.55	6.73	5.00	St
BKH-16-F3-112A	1"	2.60	2.28	3.27	2.56	1.16	0.55	0.55	6.73	5.31	St
BKH-8-F6-112A	1/2"	1.89	1.38	2.13	1.57	0.75	0.43	0.35	4.53	3.50	Zn
BKH-12-F6-112A	3/4"	2.44	1.93	2.95	2.24	0.96	0.55	0.55	6.73	5.00	St
BKH-16-F6-112A	1"	2.60	2.28	3.27	2.56	1.16	0.55	0.55	6.73	5.31	St

*Add "-LD" to the part number for locking device

CONNECTION TYPE

ISO 61-1




DIMENSIONS

TYPE	LW	L	B ₁	b ₁	t	a	b	M	Weight (lb)	Pressure Rating (PSI)
BKH-8-F3-112A	0.51	4.72	1.89	2.20	0.51	0.69	1.50	5/16" UNC	3.31	5075
BKH-12-F3-112A	0.79	5.35	1.97	2.56	0.55	0.87	1.87	3/8" UNC	6.62	5075
BKH-16-F3-112A	0.98	5.83	2.36	2.76	0.63	1.03	2.06	3/8" UNC	9.92	4650

CONNECTION TYPE

ISO 62-2



DIMENSIONS

TYPE	LW	L	B ₁	b ₁	t	a	b	M	Weight (lb)	Pressure Rating (PSI)
BKH-8-F6-112A	0.51	4.72	1.89	2.20	0.63	0.72	1.59	5/16" UNC	3.31	6000
BKH-12-F6-112A	0.79	5.35	2.36	2.80	0.75	0.94	2.00	3/8" UNC	6.06	6000
BKH-16-F6-112A	0.98	5.83	2.76	3.19	0.94	1.09	2.25	7/16" UNC	8.38	5075

Trilex Fluid Power • (CAN) 905-545-2038 • (USA) 716-283-8781
email: sales@trilexfluidpower.com • web: www.trilexfluidpower.com