
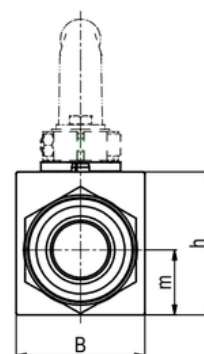


BKH SPLIT FLANGE X SPLIT FLANGE SPIGOT CD 61/62

BALL VALVES

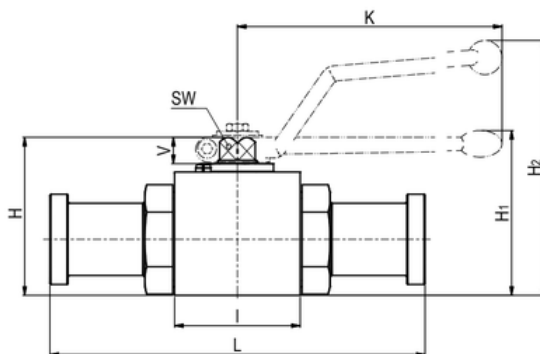

ACCESSORIES ON REQUEST

- Locking devices
- Actuator
- Mounting holes
- Positions switches
- Combinations
- Detent

MATERIAL CODE DESCRIPTION

Materials	112A
Body	Steel
Ball	Steel
Stem	Steel
Ball Seats	POM
O-Rings	NBR
Tmin / Tmax	-4°F / 212°F

AVAILABLE SIZES

1/2" to 1" (Dash Size 8-16)

CONNECTIONS

ISO 61-1, ISO 62-2


GENERAL DIMENSIONS

TYPE	SIZE	I	B	H	h	m	V	SW	K	H ₁	H ₂	Handle
BKH-8-FS3-112A	1/2"	1.89	1.38	2.13	1.57	0.75	0.43	0.35	4.53	-	3.50	Zn
BKH-12-FS3-112A	3/4"	2.44	1.93	2.95	2.24	0.96	0.55	0.55	7.87	3.11	-	Zn
BKH-16-FS3-112A	1"	2.60	2.28	3.27	2.56	1.16	0.55	0.55	7.87	3.43	-	Zn
BKH-8-FS6-112A	1/2"	1.89	1.38	2.13	1.57	0.75	0.43	0.35	4.53	-	3.50	Zn
BKH-12-FS6-112A	3/4"	2.44	1.93	2.95	2.24	0.96	0.55	0.55	7.87	3.11	-	Zn
BKH-16-FS6-112A	1"	2.60	2.28	3.27	2.56	1.16	0.55	0.55	7.87	3.43	-	Zn

*Add "-LD" to the part number for locking device

CONNECTION TYPE

ISO 61-1




DIMENSIONS

TYPE	LW	L	d	D	t	Weight (lb)	Pressure Rating (PSI)
BKH-8-FS3-112A	0.51	5.94	1.00	1.19	0.27	1.87	5075
BKH-12-FS3-112A	0.75	6.38	1.26	1.50	0.27	4.12	5075
BKH-16-FS3-112A	0.98	7.01	1.57	1.75	0.32	5.95	4650

CONNECTION TYPE

ISO 62-2



DIMENSIONS

TYPE	LW	L	d	D	t	Weight (lb)	Pressure Rating (PSI)
BKH-8-FS6-112A	0.51	5.94	1.00	1.25	0.31	1.98	6000
BKH-12-FS6-112A	0.75	6.85	1.26	1.63	0.35	4.39	6000
BKH-16-FS6-112A	0.98	7.80	1.57	1.87	0.38	6.62	5075

Trilex Fluid Power • (CAN) 905-545-2038 • (USA) 716-283-8781
email: sales@trilexfluidpower.com • web: www.trilexfluidpower.com