
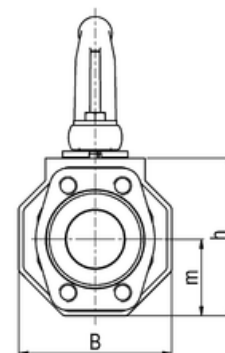


MKHP SAE - COMPANION (FLAT FACE) X COMPANION (FLAT FACE) CODE 61/62

BALL VALVES

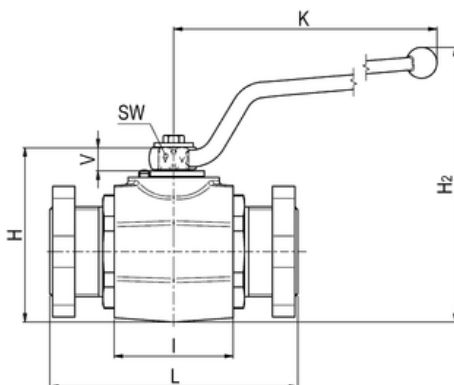

ACCESSORIES ON REQUEST

- Locking devices
- Actuator
- Mounting holes
- Positions switches
- Combinations
- Detent

MATERIAL CODE DESCRIPTION

Materials	112A
Body	Steel
Ball	Steel
Stem	Steel
Ball Seats	POM
O-Rings	NBR
Tmin / Tmax	-4°F / 212°F

AVAILABLE SIZES

1 1/4" to 2 1/2" (Dash Size 20-32)

CONNECTIONS

ISO 6162-1, ISO 6162-2


GENERAL DIMENSIONS

TYPE	I	B 8Kt	H	h	m	V	SW	K	H ₂	Lever
MKHP-20-F3-112A	3.15	3.19	4.21	3.39	1.59	0.65	0.67	12.05	7.09	St
MKHP-24-F3-112A	3.35	3.94	4.88	4.06	1.97	0.65	0.67	12.05	7.76	St
MKHP-32-F3-112A	3.94	4.65	5.43	4.61	2.32	0.65	0.67	12.05	8.31	St
MKHP-20-F6-112A	3.15	3.19	4.21	3.39	1.59	0.65	0.67	12.05	7.09	St
MKHP-24-F6-112A	3.35	3.94	4.88	4.06	1.97	0.65	0.67	12.05	7.76	St
MKHP-32-F6-112A	3.94	4.65	5.43	4.61	2.32	0.65	0.67	12.05	8.31	St

*Add "-LD" to the part number for locking device

CONNECTION TYPE

ISO 6162-1




DIMENSIONS

TYPE	LW	L	B ₁	b ₁	t	a	b	M	Weight (Kg)	PR [psi]
MKHP-20-F3-112A	1.26	6.77	2.68	3.11	0.63	1.19	2.31	7/16" UNC	16.58	4050
MKHP-24-F3-112A	1.50	6.97	3.07	3.66	0.63	1.41	2.75	1/2" UNC	24.45	3000
MKHP-32-F3-112A	1.89	7.72	3.54	4.02	0.63	1.69	3.06	1/2" UNC	42.53	3000

CONNECTION TYPE

ISO 6162-2



DIMENSIONS

TYPE	LW	L	B ₁	b ₁	t	a	b	M	Weight (Kg)	PR [psi]
MKHP-20-F6-112A	1.26	6.77	3.07	3.74	1.06	1.25	2.63	1/2" UNC	16.58	6000
MKHP-24-F6-112A	1.50	6.97	3.70	4.41	1.18	1.44	3.13	5/8" UNC	24.45	6000
MKHP-32-F6-112A	1.89	7.72	4.49	5.28	1.38	1.75	3.81	3/4" UNC	42.53	6000

Trilex Fluid Power • (CAN) 905-545-2038 • (USA) 716-283-8781
email: sales@trilexfluidpower.com • web: www.trilexfluidpower.com