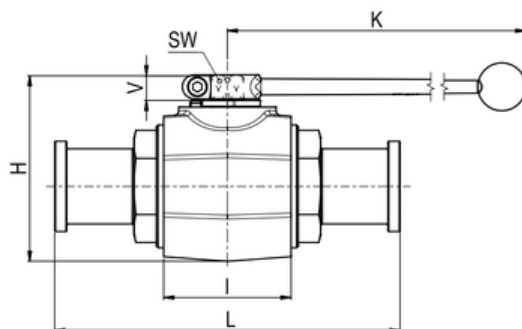

ACCESSORIES ON REQUEST

- Locking devices
- Actuator
- Mounting holes
- Positions switches
- Combinations
- Detent

MATERIAL CODE DESCRIPTION

Materials	112A
Body	Steel
Ball	Steel
Stem	Steel
Ball Seats	POM
O-Rings	NBR
Tmin / Tmax	-4°F / 212°F

AVAILABLE SIZES

1 1/4" to 2" (Dash Size 20-32)


CONNECTIONS

ISO 6162-1, ISO 6162-2


GENERAL DIMENSIONS

TYPE	SIZE	I	B 8Kt	H	h	m	V	SW	K	Lever
MKHP-20-FS3-112A	1 1/4"	3,15	3,19	4,21	3,39	1,59	0,65	0,67	12,60	Al
MKHP-24-FS3-112A	1 1/2"	3,35	3,94	4,88	4,06	1,97	0,65	0,67	12,60	Al
MKHP-32-FS3-112A	2"	3,94	4,65	5,43	4,61	2,32	0,65	0,67	12,60	Al
MKHP-20-FS6-112A	1 1/4"	3,15	3,19	4,21	3,39	1,59	0,65	0,67	12,60	Al
MKHP-24-FS6-112A	1 1/2"	3,35	3,94	4,88	4,06	1,97	0,65	0,67	12,60	Al
MKHP-32-FS6-112A	2"	3,94	4,65	5,43	4,61	2,32	0,65	0,67	12,60	Al

Please note the pressure ratings of the connection flanges!

CONNECTION TYPE
ISO 6162-1

DIMENSIONS

TYPE	LW	L	d ^{+/-0,1}	D _{0,2}	t _{0,2}	Weight (Kg)	Pressure Rating [psi]
MKHP-20-FS3-112A	1.18	7.52	1.76	2.00	0.32	9.31	4000
MKHP-24-FS3-112A	1.50	9.09	2.13	2.37	0.32	14.42	3000
MKHP-32-FS3-112A	1.89	9.13	2.50	2.81	0.38	20.48	3000

CONNECTION TYPE
ISO 6162-2

DIMENSIONS

TYPE	LW	L	d ^{+/-0,1}	D _{0,2}	t _{0,2}	Weight (Kg)	Pressure Rating [psi]
MKHP-20-FS6-112A	1.18	8.78	1.76	2.13	0.41	10.41	6000
MKHP-24-FS6-112A	1.50	11.06	2.13	2.50	0.50	16.52	6000
MKHP-32-FS6-112A	1.89	12.44	2.50	3.13	0.50	25.11	6000