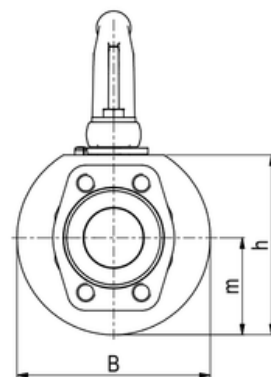
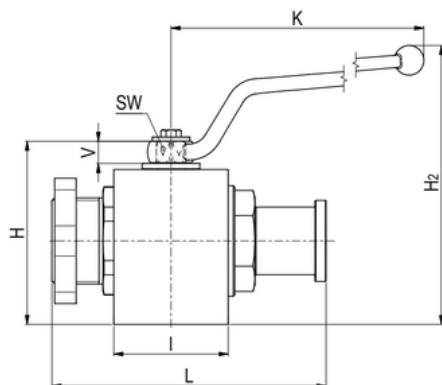


**MKHP-SAE/SAEFS SERIES - SAE FLANGE/
 SPLIT FLANGE ADAPTER STEEL**
BALL VALVES

ACCESSORIES ON REQUEST

- Locking devices
- Actuator
- Mounting holes
- Positions switches
- Combinations
- Detent


MATERIAL CODE DESCRIPTION

Materials	112A
Body	Steel
Ball	Steel
Stem	Steel
Ball Seats	POM
O-Rings	NBR
Tmin / Tmax	-4°F / 212°F


AVAILABLE SIZES
1 1/4" to 2" (Dash Size 20-32)
CONNECTIONS
ISO 6162-1, ISO 6162-2
GENERAL DIMENSIONS

TYPE	SIZE	I	B 8Kt	H	h	m	V	SW	K	H ₂	Lever
MKHP-20-C3-112A	1 1/4"	3.15	3.19	4.21	3.39	1.59	0.65	0.67	12.05	7.09	St
MKHP-24-C3-112A	1 1/2"	3.35	3.94	4.88	4.06	1.97	0.65	0.67	12.05	7.76	St
MKHP-32-C3-112A	2"	3.94	4.65	5.43	4.61	2.32	0.65	0.67	12.05	8.31	St
MKHP-20-C6-112A	1 1/4"	3.15	3.19	4.21	3.39	1.59	0.65	0.67	12.05	7.09	St
MKHP-24-C6-112A	1 1/2"	3.35	3.94	4.88	4.06	1.97	0.65	0.67	12.05	7.76	St
MKHP-32-C6-112A	2"	3.94	4.65	5.43	4.61	2.32	0.65	0.67	12.05	8.31	St

*Add "-LD" to the part number for locking device

CONNECTION TYPE
ISO 6162-1

DIMENSIONS

TYPE	LW ₁	LW ₂	L	B ₁	b ₁	T	a	b	M ⁽¹⁾	d	D	t	Weight (Kg)	PR [psi]
MKHP-20-C3-112A	1.26	1.18	7.13	2.68	3.11	0.63	1.19	2.31	M10	1.76	2.00	0.32	12.94	4000
MKHP-24-C3-112A	1.50	1.50	8.03	3.07	3.66	0.63	1.41	2.75	M12	2.13	2.37	0.32	19.45	3000
MKHP-32-C3-112A	1.89	1.89	8.43	3.54	4.02	0.63	1.69	3.06	M12	2.50	2.81	0.32	31.53	3000

CONNECTION TYPE
ISO 6162-2

DIMENSIONS

TYPE	LW ₁	LW ₂	L	B ₁	b ₁	T	a	b	M ⁽¹⁾	d	D	t	Weight (Kg)	PR [psi]
MKHP-20-C6-112A	1.26	1.18	7.80	3.07	3.74	1.06	1.25	2.63	M12	1.76	2.13	0.41	13.49	6000
MKHP-24-C6-112A	1.50	1.50	9.02	3.70	4.41	1.18	1.44	3.13	M16	2.13	2.50	0.50	20.48	6000
MKHP-32-C6-112A	1.89	1.89	10.08	4.49	5.28	1.38	1.75	3.81	M20	2.50	3.13	0.50	33.82	6000

 Trilex Fluid Power • (CAN) 905-545-2038 • (USA) 716-283-8781
 email: sales@trilexfluidpower.com • web: www.trilexfluidpower.com