



BKH COMBINATION FLAT FACE (COMPANION) X SPIGOT (O-RING) STEEL

BALL VALVES

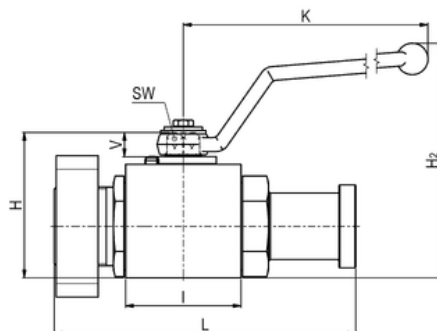

ACCESSORIES ON REQUEST

- Locking devices
- Actuator
- Mounting holes
- Positions switches
- Combinations
- Detent

MATERIAL CODE DESCRIPTION

Materials	112A
Body	Steel
Ball	Steel
Stem	Steel
Ball Seats	POM
O-Rings	NBR
Tmin / Tmax	-20°C / 100°C

AVAILABLE SIZES

1/2" to 1" (Dash Size 8-16)

CONNECTIONS

ISO 61-1, ISO 62-2


GENERAL DIMENSIONS

TYPE	SIZE	I	B	H	h	m	V	SW	K	H ₂	Lever
BKH-8-C3-112A	1/2"	48	35	54	40	19	11	9	115	89	Zn
BKH-12-C3-112A	3/4"	62	49	75	57	24,5	14	14	171	127	St
BKH-16-C3-112A	1"	66	58	83	65	29,5	14	14	171	135	St
BKH-8-C6-112A	1/2"	48	35	54	40	19	11	9	115	89	Zn
BKH-12-C6-112A	3/4"	62	49	75	57	24,5	14	14	171	127	St
BKH-16-C6-112A	1"	66	58	83	65	29,5	14	14	171	135	St

*Add "-LD" to the part number for locking device

CONNECTION TYPE

ISO 61-1




DIMENSIONS

TYPE	LW ₁	LW ₂	L	B ₁	b ₁	T	a	b	M ⁽¹⁾	d	D	t	Weight (Kg)	PN (bar)
BKH-8-C3-112A	13	13	136	48	56	13	17,5	38,1	M8	25,5	30,2	6,8	1,18	350
BKH-12-C3-112A	20	19	149	50	65	14	22,2	47,6	M10	31,9	38,1	6,8	2,15	350
BKH-16-C3-112A	25	25	163	60	70	16	26,2	52,4	M10	39,8	44,4	8,1	3,60	320

CONNECTION TYPE

ISO 62-2



DIMENSIONS

TYPE	LW ₁	LW ₂	L	B ₁	b ₁	T	a	b	M ⁽¹⁾	d	D	t	Weight (Kg)	PN (bar)
BKH-8-C6-112A	13	13	136	48	56	16	18,2	40,5	M8	25,5	31,8	7,9	1,20	420
BKH-12-C6-112A	20	19	155	60	71	19	23,8	50,8	M10	31,9	41,3	8,9	2,26	420
BKH-16-C6-112A	25	25	173	70	81	24	27,8	57,2	M12	39,8	47,6	9,6	3,75	350